

Name of the Student: _____


Max. Marks : 23 Marks

Time : 23 Minutes

Q1.

Figure 1 shows the structure of a traditional transformer.

Figure 1

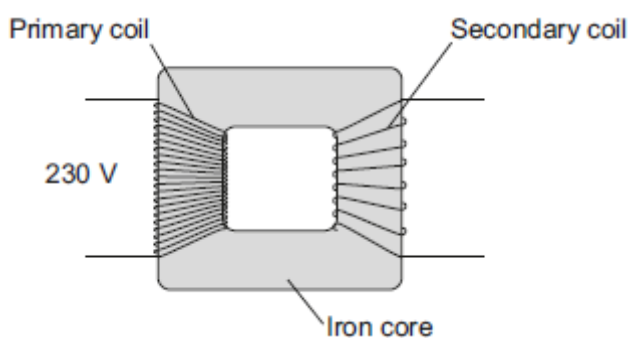

- (a) There is an alternating current in the primary coil of the transformer.

State what is produced in the iron core.

(2)

- (b) A transformer has only **one** turn of wire on the secondary coil.
The potential difference across the secondary coil is 11.5 V
The potential difference across the primary coil is 230 V

Calculate the number of turns on the primary coil.

Number of turns on the primary coil = _____


(2)

- (c) In most transformers, the power output is less than the power input.

State why.

- (d) Two students investigated how magnets can be used to produce a potential difference. The students held a coil of wire above a magnet. The students quickly lowered the coil so that the magnet was inside the coil, as shown in **Figure 2**.

Figure 2

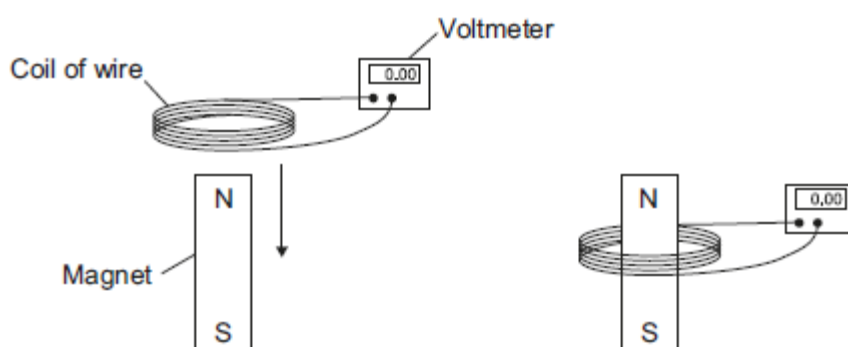

The students recorded the maximum potential difference for coils with different numbers of turns of wire. The results are shown in the table.

Number of turns of wire in the coil	Maximum potential difference in volts	
	Results from student 1	Results from student 2
5	0.09	0.08
10	0.20	0.15
15	0.31	0.25
20	0.39	0.33
25	0.51	0.39

- (i) State the resolution of the voltmeter.

Give **one** reason why the resolution of the voltmeter is suitable for this investigation.

Resolution _____

Reason _____

(2)

- (ii) The two students used exactly the same equipment to carry out their investigations. Both students recorded their results correctly.

Give the reason why student 2 got different results from student 1.

(1)

- (iii) The students decided that even though the results were different, there was no need to

repeat the investigation.

How do the results show that the investigation is reproducible?

(1)

- (iv) State the name of the process which causes the potential difference to be produced in this investigation.

(1)

- (e) A transformer has been developed that can be used with many different devices.

Suggest **one** advantage of having a transformer that can be used with many different devices.


(1)

(Total 11 marks)

Q2.

Transformers are used to change potential differences (p.d.) in the National Grid.

Figure 1 shows a step-up transformer that is used at a power station.

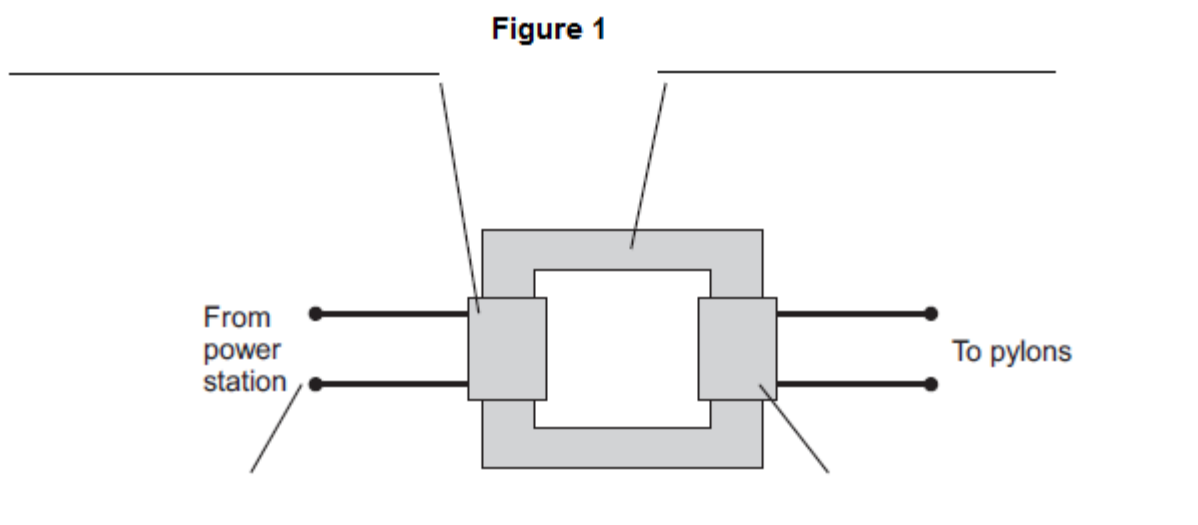

- (a) (i) Use words from the box to label **Figure 1**.

Input p.d.	Iron core	Output p.d.
Primary coil	Secondary coil	

(4)

- (ii) One of the coils in **Figure 1** has a p.d. of 25 kV across it and has 1000 turns.
The other coil has a p.d. of 400 kV across it.

Calculate the number of turns on this other coil.

Number of turns = _____

(2)

(iii) Explain why a step-up transformer is used at a power station.

(3)

(b) **Figure 2** shows a mobile phone charger.

Figure 2



The charger contains a step-down transformer. A switch mode transformer is used rather than a traditional transformer.

Describe the advantages of using a switch mode transformer in the charger rather than a traditional transformer.

(3)

(Total 12 marks)